


ELLISSE PENDANT MAJOR

Federico Palazzari

Lampe à suspension LED en trois versions: major, minor et double, pour une lumière diffuse direct ou indirecte, en aluminium extrudé verni blanc, noir mat, poli ou poli or. Diffuseur opalin. Ellisse est réalisée grâce à une technique exclusive de couplage des extrudés (brevet en cours). La version Major est disponible dans la version applique et lampadaire. Elle peut être utilisée avec une base en marbre noir ou avec un kit pour l'installation murale.

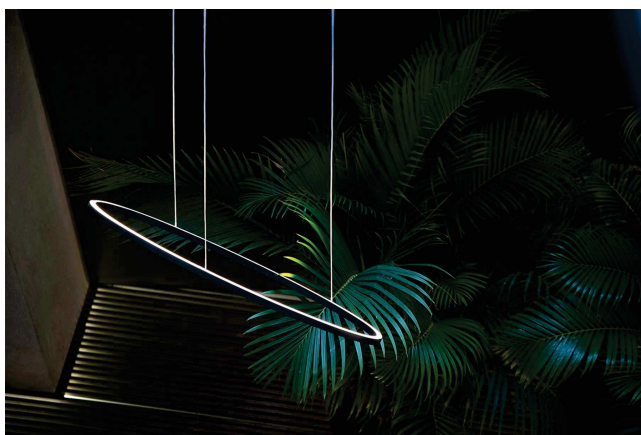

DOWNLIGHT | 3000K

SOURCE LUMINEUSE

Lampe	linear LED
Puissance totale	66W
Émission	diffused orientable
Allumage	dimnable 1-10V
Tension	110/230V
Température de couleur	3000K
Flux lumineux	3450lm (luminous output)
Type CRI	85
Classe énergétique	A+
Matériaux	Aluminium
Notes	cable length 2,5m; adjustable cable length up to 0,4 m
Net lamp weight	5 Kg

Codes

ELP LWW 54	<i>Structure/Diffuser</i> white/white
ELP LNW 54	black/white
ELP LOW 54	gold painted/white
ELP LLW 54	polished aluminium/white

PACKAGE

Package 01	80x150x15 cm / Gross weight: 7.5 Kg
------------	-------------------------------------

Certificazioni



DOWNLIGHT | 2700K

SOURCE LUMINEUSE

Lampe	linear LED
Puissance totale	66W
Émission	diffused orientable
Allumage	dimnable 1-10V
Tension	110/230V
Température de couleur	2700K
Flux lumineux	3450lm (luminous output)
Type CRI	85
Classe énergétique	A+
Matériaux	Aluminium
Notes	cable length 2,5m; adjustable cable length up to 0,4 m
Net lamp weight	5 Kg

Codes

ELP LW2 54	white/white
ELP LN2 54	black/white
ELP LGW 54	gold polished anodized/white
ELP LL2 54	polished aluminium/white
ELP LO2 54	gold painted/white

Structure/Diffuser

PACKAGE

Package 01	80x150x15 cm / Gross weight: 7.5 Kg
------------	-------------------------------------

Certificazioni



UPLIGHT | 3000K

SOURCE LUMINEUSE

Lampe	linear LED
Puissance totale	66W
Émission	diffused orientable
Allumage	dimnable 1-10V
Tension	110/230V
Température de couleur	3000K
Flux lumineux	3450lm (luminous output)
Type CRI	85
Classe énergétique	A+
Matériaux	Aluminium
Notes	cable length 2,5m; adjustable cable length up to 0,4 m
Net lamp weight	5 Kg

Codes

ELP LWW 53	white/white
ELP LNW 53	black/white
ELP LLW 53	polished aluminium/white
ELP LOW 53	gold painted/white

Structure/Diffuser

PACKAGE

Package 01	80x150x15 cm / Gross weight: 7.5 Kg
------------	-------------------------------------

Certificazioni



UPLIGHT | 2700K

SOURCE LUMINEUSE

Lampe	linear LED
Puissance totale	66W
Émission	diffused orientable
Allumage	dimnable 1-10V
Tension	110/230V
Température de couleur	2700K
Flux lumineux	3450lm (luminous output)
Type CRI	85
Classe énergétique	A+
Matériaux	Aluminium
Notes	cable length 2,5m; adjustable cable length up to 0,4 m
Net lamp weight	5 Kg

Codes

ELP LW2 53	white/white
ELP LN2 53	black/white
ELP LGW 53	gold polished anodized/white
ELP LL2 53	polished aluminium/white
ELP LO2 53	gold painted/white

Structure/Diffuser

white/white
black/white
gold polished anodized/white
polished aluminium/white
gold painted/white

PACKAGE

Package 01	80x150x15 cm / Gross weight: 7.5 Kg
------------	-------------------------------------

Certificazioni

